


PARAMBU ORGANICS

SOAP & OIL UNIT • FLOOR PLAN

36'-0" × 70'-0" internal • 2,520 sq ft • east facing • north up

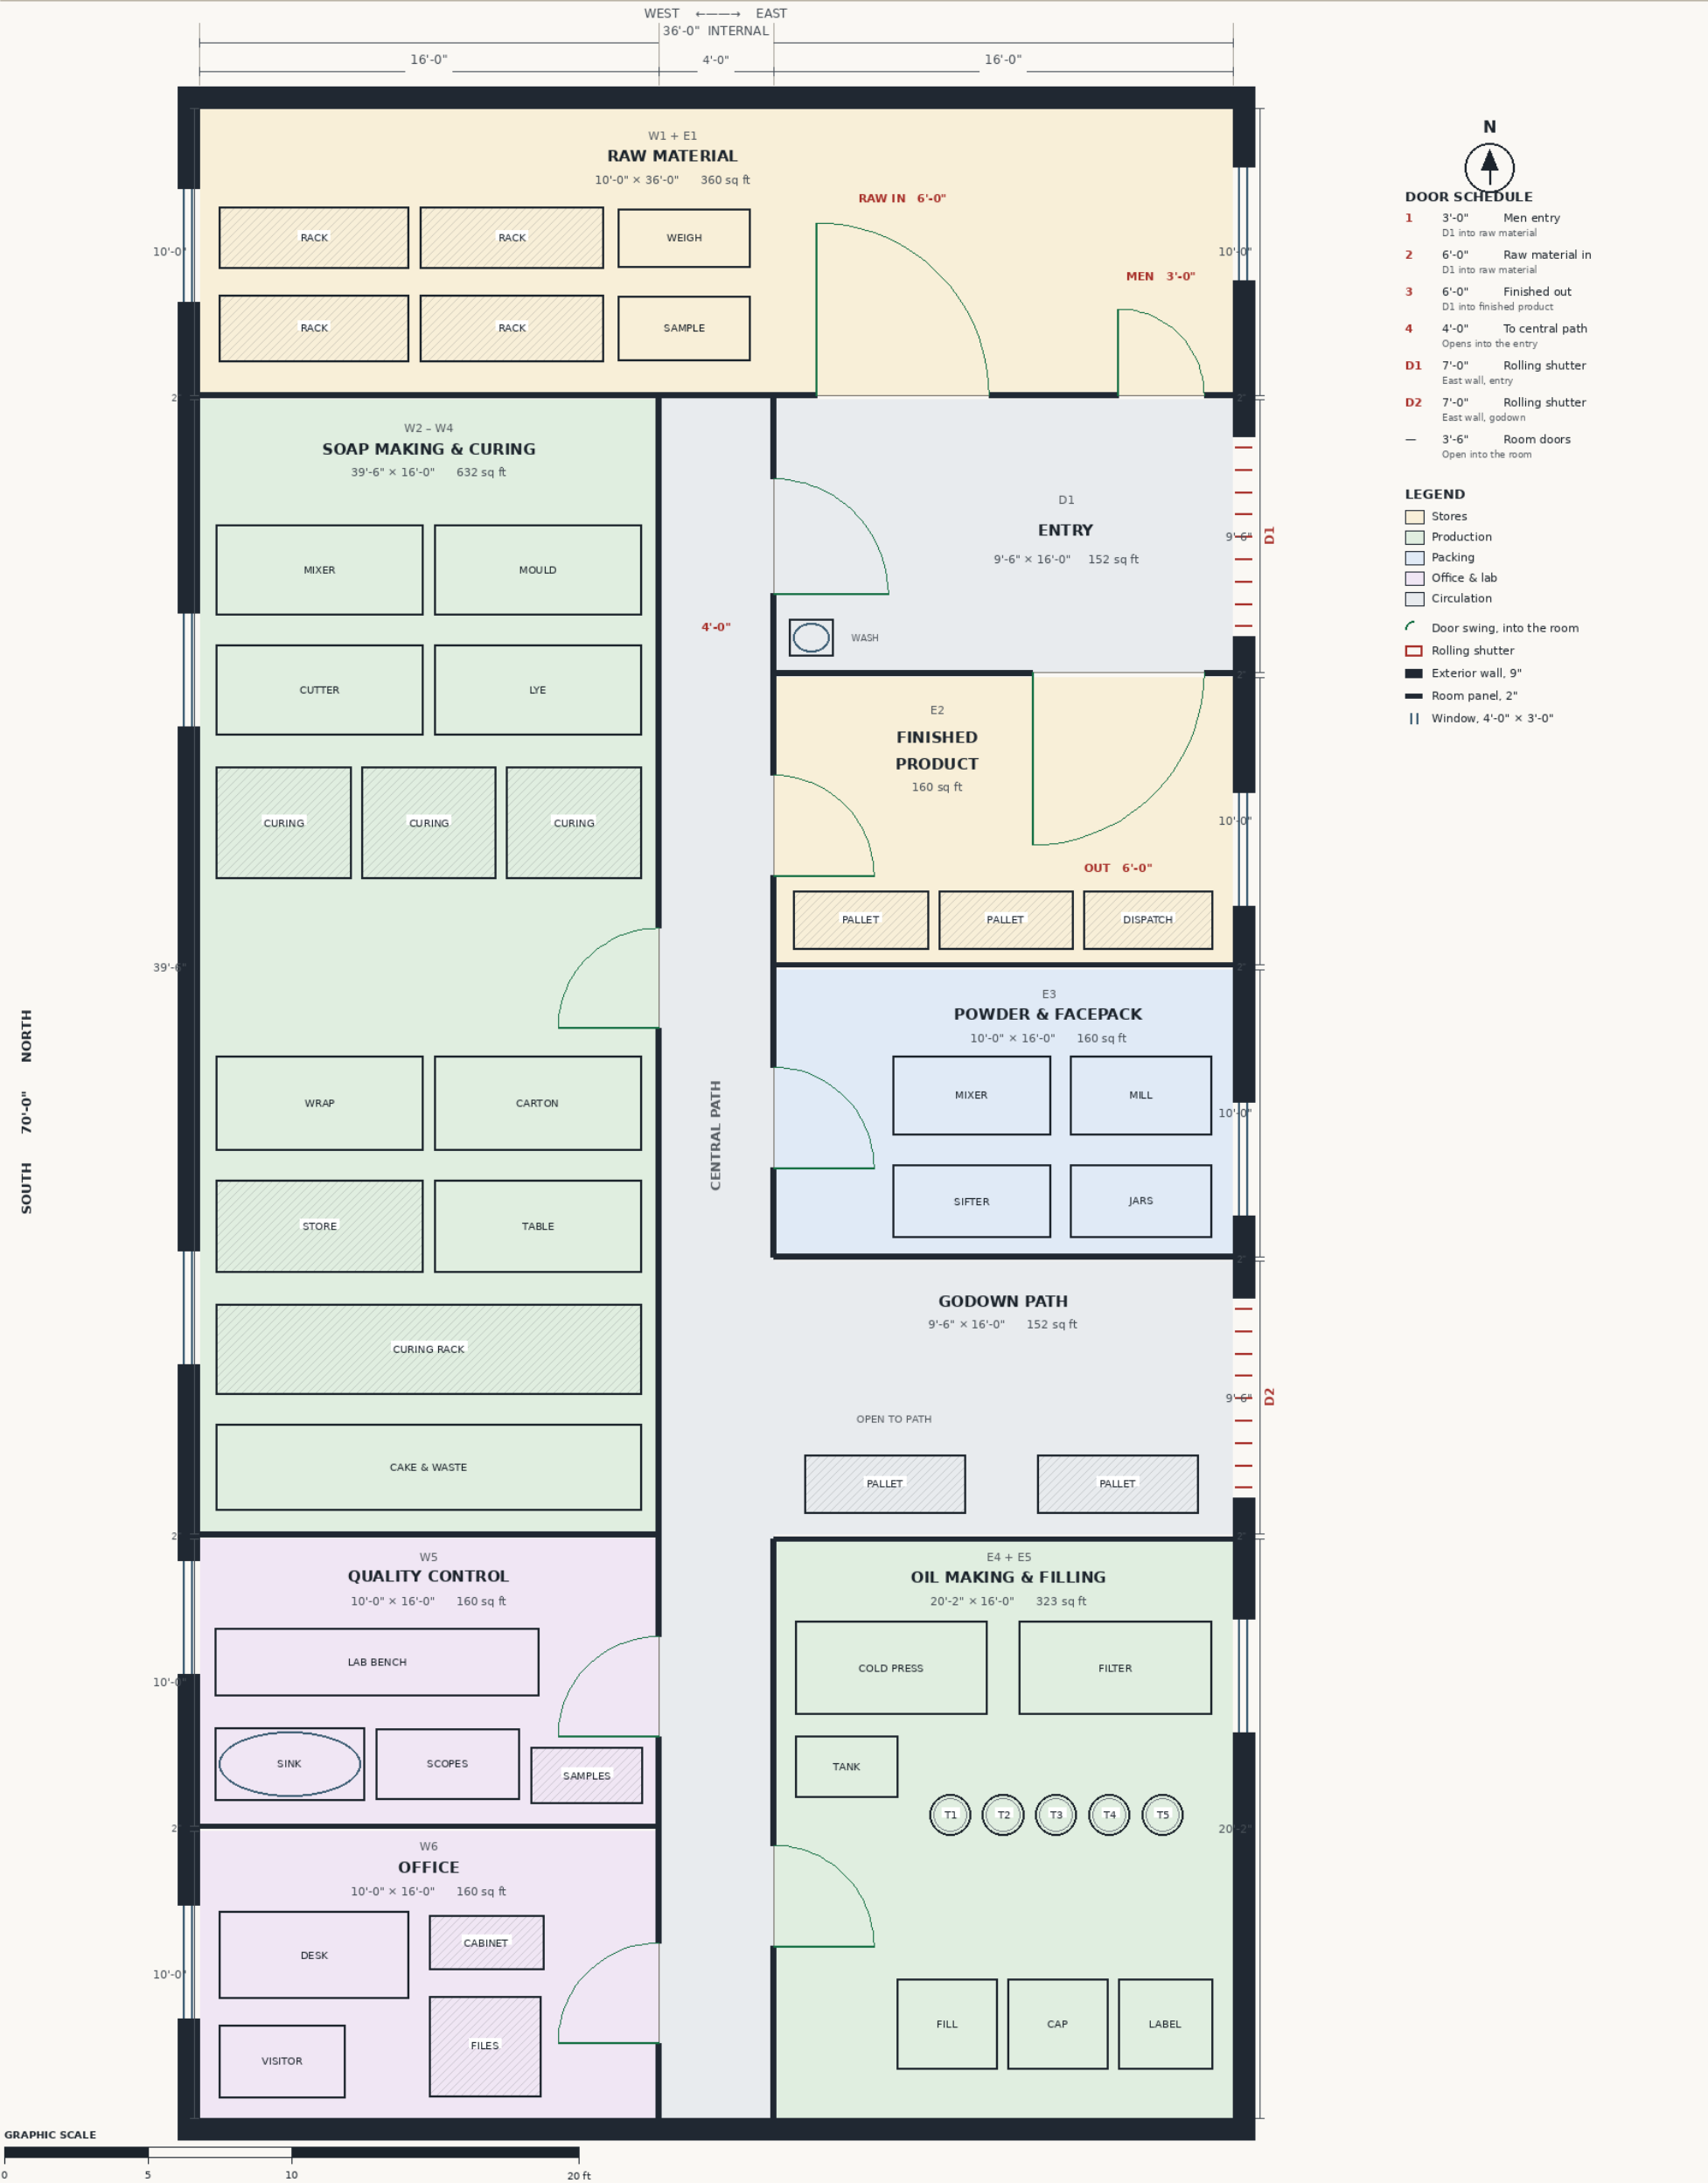

ROOM SCHEDULE

Raw material	36'-0" × 10'-0"	360	Powder & facepack	10'-0" × 16'-0"	160
Soap making & curing	39'-6" × 16'-0"	632	Finished product	10'-0" × 16'-0"	160
Quality control	10'-0" × 16'-0"	160	D1 entry	9'-6" × 16'-0"	152
Office	10'-0" × 16'-0"	160	Godown loading path	9'-6" × 16'-0"	152
Oil making & filling	20'-2" × 16'-0"	323	Central path	4'-0" × 60'-0"	240

Areas rounded to the nearest square foot. 2" panels make up the rest of 2,520 sq ft.

CONSTRUCTION NOTES

- Separators are 2" (50 mm) panels — cement board, PUF or gypsum on a light frame. No masonry wall between rooms. The exterior wall is drawn at 9" outside the internal dimensions.
- East-west internal size closes exactly: 16'-0" west rooms + 4'-0" path + 16'-0" east rooms = 36'-0". Every occupied bay is 16'-0" deep.
- W2, W3 and W4 are one soap making and curing room. W5 is quality control. W6 is the office, with the owner's seat facing east.
- E4 and E5 are one oil making and filling room. E3 is powder and facepack. E2 is finished product. The godown loading path is open to the central path.
- W1 and E1 are one raw-material room across the north, so the 4'-0" path stops at that wall. From D1: 3'-0" men door and 6'-0" raw-material door into that room, 6'-0" door into finished product, and 4'-0" door onto the central path.
- Unmarked doors are 3'-6" × 7'-0" and open into the room, clear of the path. D1 and D2 are 7'-0" east-facing rolling shutters.
- Floor: IPS / epoxy with 4" coved skirting, graded to trapped gullies. No false ceiling. 12'-0" clear to the purlins over soap and oil.
- Windows are 4'-0" × 3'-0" on the west and east walls, with insect screens. Exhaust over the lye bench and over the cold press.
- Toilet block is detached, minimum 25'-0" clear of the north wall, and never opens into a production room. Hand wash is in the D1 entry.