


FLOOR PLAN 36'-0" x 70'-0" = 2,520 SQ FT · EAST FACING

W1/W2 and east packing bay are PVC-screened - 4'-0" central path - 2" panels at closed rooms - no false ceiling

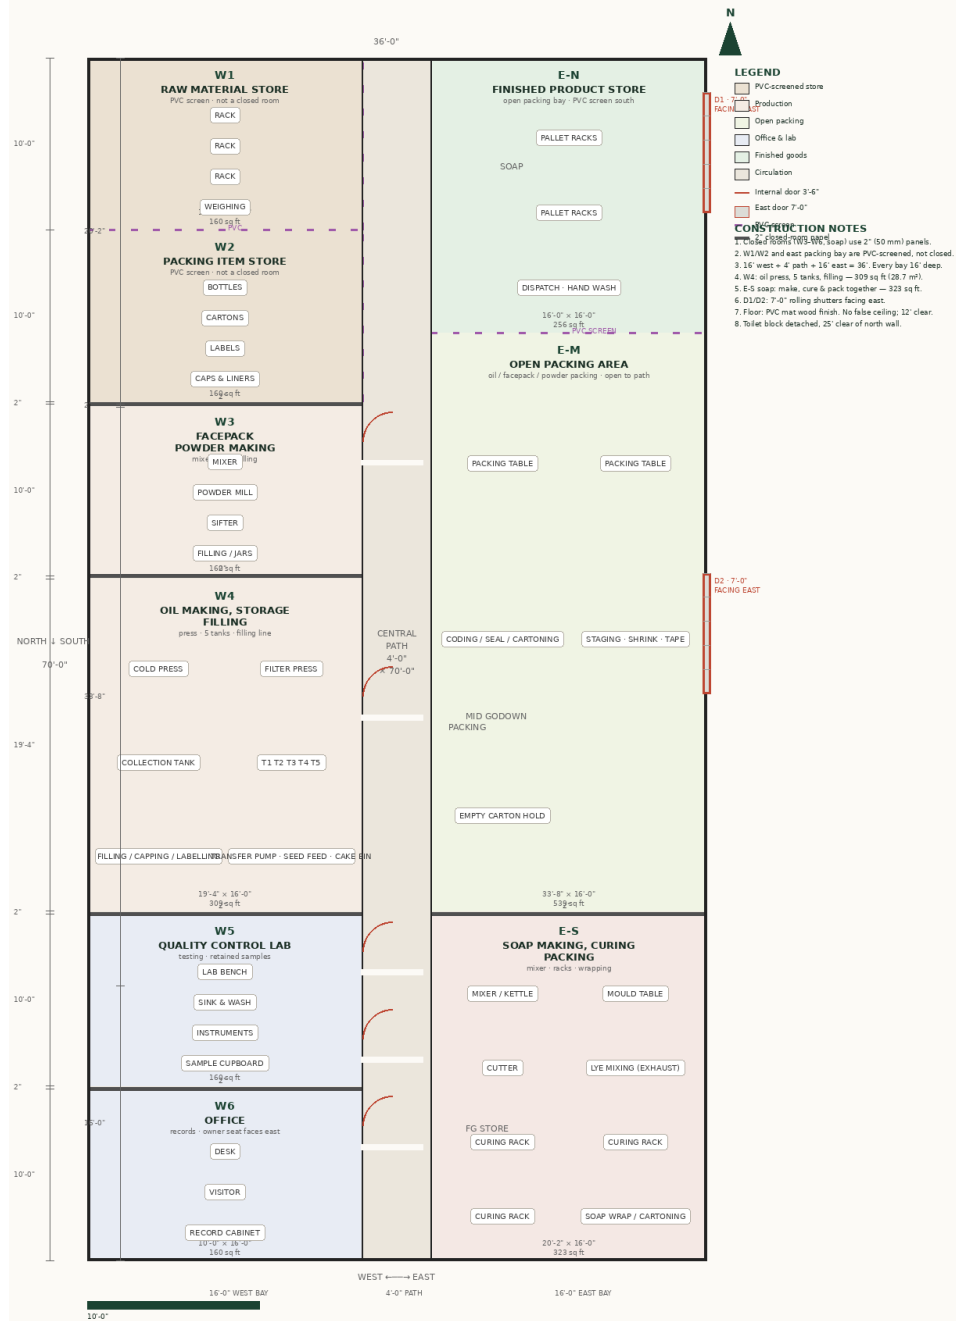

PARAMBU — SOAP, OIL, FACEPACK & POWDER

ROOM SCHEDULE, PROCESS FLOW & NOTES · 36'-0" × 70'-0" = 2,520 sq ft

CODE	ROOM	SIZE	AREA	ZONE	NOTES
W1	Raw material store	10'-0" × 16'-0"	160 sq ft	North-west	PVC screen, not closed
W2	Packing item store	10'-0" × 16'-0"	160 sq ft	North-west	PVC screen, not closed
W3	Facepack & powder making	10'-0" × 16'-0"	160 sq ft	West	Mixer, mill, sifter, jar filling
W4	Oil making, storage & filling	19'-4" × 16'-0"	309 sq ft	West / SW	Cold press, 5 tanks, filling line
W5	Quality control lab	10'-0" × 16'-0"	160 sq ft	South-west	Bench, sink, retained samples
W6	Office	10'-0" × 16'-0"	160 sq ft	South-west	Records; owner seated facing east
E-N	Finished product store	16'-0" × 16'-0"	256 sq ft	North-east	Open bay, PVC screen to packing
E-M	Open packing area	33'-8" × 16'-0"	539 sq ft	East	Open to path; oil/facepack/powder pack
E-S	Soap making, curing & packing	20'-2" × 16'-0"	323 sq ft	South-east	Mixer, curing racks, wrapping
P1	Central path	4'-0" × 70'-0"	280 sq ft	Centre	Serves every bay

Working bays = 2,227 sq ft · path = 280 sq ft · 2" panels = 13 sq ft · built-up = 2,520 sq ft

PROCESS FLOW

OIL: W1 raw material → W4 make/tanks/fill → E-M open packing → E-N finished goods → D1/D2 dispatch

PACK: W1 raw material → W3 facepack & powder → E-M open packing → E-N finished goods → D1/D2 dispatch

SOAP: W1 raw material → E-S soap make/cure/pack → E-N finished goods → D1/D2 dispatch

VASTU — PLACEMENT

- Office in south-west (W6), owner seated facing east.
- Soap making in south-east (E-S), Agni corner, with curing and packing in same room.
- Oil plant in W4 (west/south-west) — right side for heavy machinery.
- Finished goods in north-east (E-N), next to D1 for east dispatch without crossing production.
- W1/W2 open PVC bays north-west for raw material and packing items.
- QC lab in W5 next to office. 4'-0" central path keeps centre free of machines.

DOOR, SCREEN & FINISH SCHEDULE

MARK	SIZE / TYPE	LOCATION	REMARKS
D1	7'-0" rolling shutter	East wall, finished-goods bay	Main entry, facing east, north-east
D2	7'-0" rolling shutter	East wall, open packing (mid-godown)	Second east door, facing east
W3–W6, E-S	3'-6" × 7'-0" flush	Each closed room to path	Opens into room, not into path
W1 / W2	PVC strip curtain	Full opening onto central path	Not closed; PVC between W1 and W2
E-N / E-M	PVC screen	Between finished goods and packing	Open packing bay, no masonry
Floor	PVC mat, wood finish	Entire 36' × 70' shed	No tiles / no epoxy
Ceiling	None — no false ceiling	Entire shed	Exposed roof; 12'-0" clear to purlins

Dimension check: west 10'+10'+10'+19'-4"+10'+10'+four 2" panels=70'-0" | east 16'+33'-8"+2"+20'-2"=70'-0" | across 16'+4'+16'=36'-0"